






When minimalism embraces. It involves technology and the 3D processing of a wood sheet. It involves a hand that designs, thinking of itself, of the palm that holds water and sand. The result is sinuous MIUNN, with an embracing seat and perfect support for the back. Available in a chair or stool version, it comes in different heights. Serenely, just as it was designed.



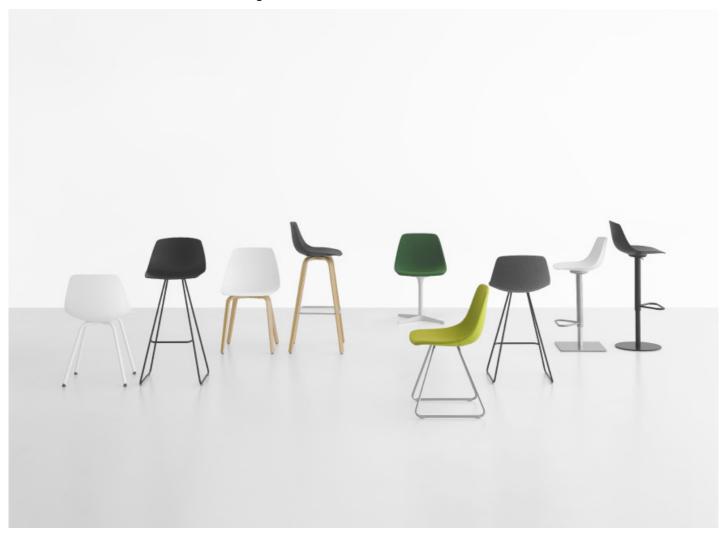




## | S160 slide-frame base

Chair with sled base in mat chromed steel or powder coated. Shell in 3D moulded plywood in several finishes, or in Baydur® fi re retardant polyurethane white or black or fully upholstered wih fabric or leather. Glides in polythene. It is complemented by a stool in two heights or height adjustable.

TEST EN 1728:2012 AC:2013 6.17 - EN 16139:2013 - L2 extreme

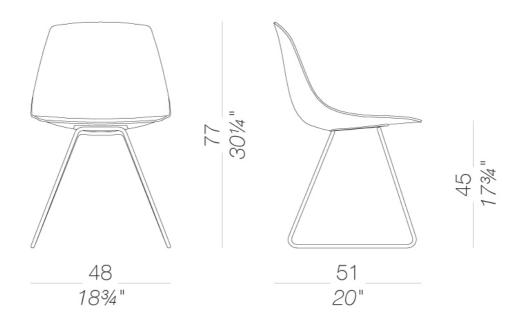



## | S164 With four wood legs


Chair with plywood legs and shell in 3D moulded plywood in several finishes, or in Baydur® fire retardant polyurethane white or black or fully upholstered wih fabric or leather. Glides in nylon with felt. It is complemented by a stool in two heights or height adjustable.





## | S162 Star-shaped swivel base

Chair with swivel star base in sandblasted aluminium or powder coated. Shell in 3D moulded plywood in several finishes, or in Baydur® fi re retardant polyurethane white or black or fully upholstered wih fabric or leather. Glides in polythene. It is complemented by a stool in two heights or height adjustable.

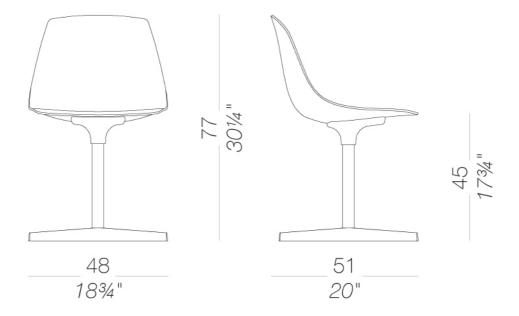



## | S161 4-legged

Chair with four legged base in mat chromed steel or powder coated. Shell in 3D moulded plywood in several finishes, or in Baydur® fire retardant polyurethane white or black or fully upholstered wih fabric or leather. Glides in polythene. It is complemented by a stool in two heights or height adjustable.






## | S104\_65 counter stool with slide-frame base H65

Stool h.65 cm. with sled base in steel rod either mat chromed or powder coated. Seat formed of a single shell using 3D plywood moulding technology in several wood finishes, or in fire-retardant Baydur® polyurethane white or black lacquered or totally upholstered with fabric, leather or eco-leather. Glides in polypropylene with insert in felt or plastic.


TEST EN 1728:2012 AC:2013 6.4-6.5 - EN 16139:2013 - L2 extreme

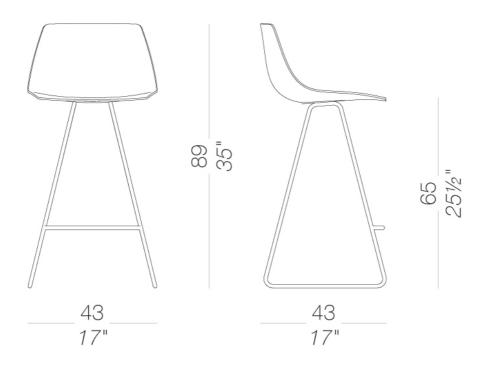



## | S104\_75 bar stool with slide-frame base H75

Stool h.75 cm. with sled base in steel rod either mat chromed or powder coated. Seat formed of a single shell using 3D plywood moulding technology in several wood fi nishes, or in fire-retardant Baydur® polyurethane white or black lacquered or totally upholstered with fabric, leather or eco-leather. Glides in polypropylene with insert in felt or plastic.

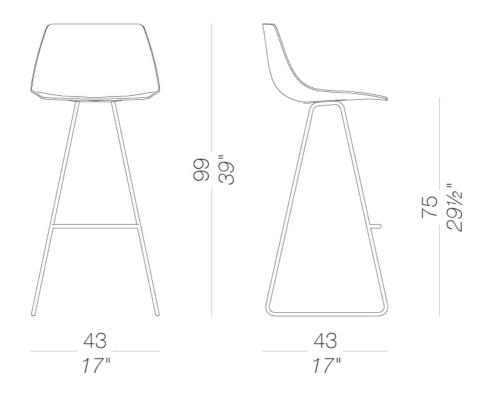




### | S104T Height-adjustable piston stool with round base H53 ÷ 78

Stool with swivel seat and adjustable height. Frame in sandblasted stainless steel Aisi304 and round base covered by a stainless steel sheet "linen fabric" pattern or entirely powder coated. Seat formed of a single shell using 3D plywood moulding technology in several wood finishes, or in fire-retardant Baydur® polyurethane white or black lacquered or totally upholstered with fabric, leather or eco-leather. Felt under the base.

TEST EN 15373:2007 - L3 severe

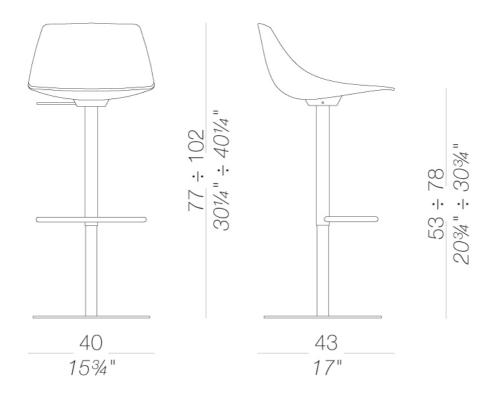




## | S104 height-adjustable piston stool with square base H53 ÷ 78

Stool with swivel seat and adjustable height. Frame in sandblasted stainless steel Aisi304 and square base covered by a stainless steel sheet "linen fabric" pattern. Seat formed of a single shell using 3D plywood moulding technology in several wood finishes, or in fire-retardant Baydur® polyurethane white or black lacquered or totally upholstered with fabric, leather or eco-leather. Felt under the base.


TEST EN 15373:2007 - L3 severe

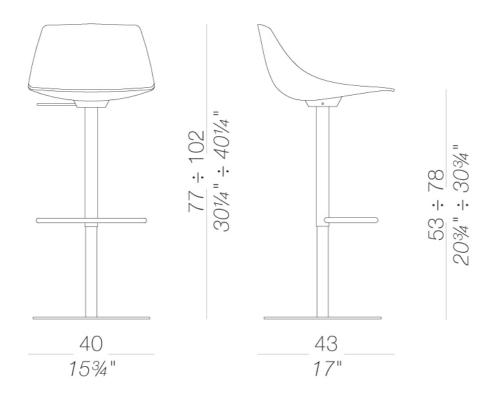



## | S105\_65 counter stool with wood legs H65


Stool h.65 cm. with legs in moulded plywood blanched oak or black stained and foot rest in steel rod mat chromed. Seat formed of a single shell using 3D plywood moulding technology in several wood fi nishes, or in fire-retardant Baydur® polyurethane white or black lacquered or totally upholstered with fabric, leather or eco-leather. Feet in nylon with felt.

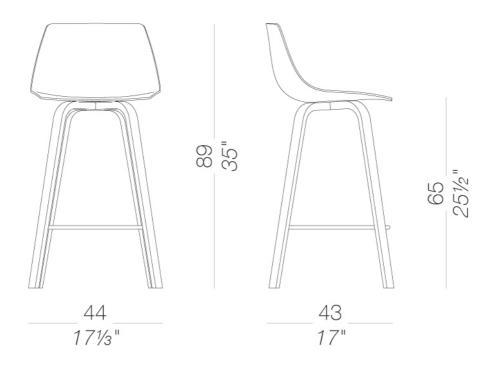



## | S105\_75 bar stool with wood legs H75

Stool h.75 cm. with legs in moulded plywood blanched oak or black stained and foot rest in steel rod mat chromed. Seat formed of a single shell using 3D plywood moulding technology in several wood finishes, or in fire-retardant Baydur® polyurethane white or black lacquered or totally upholstered with fabric, leather or eco-leather. Feet in nylon with felt.

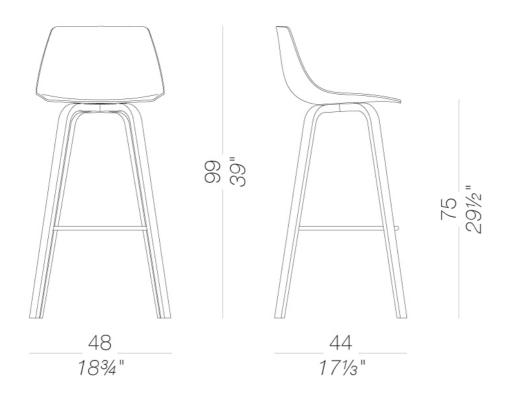



#### frame



wood blanched oak



powder coating black 1 Colors



metal stainless steel 1 Colors



powder coating white



wood black open pore



metal mat chromed



metal aluminium 1 Colors

#### shell



plastics Bavdur®



wood blanched oak 1 Colors



wood black open pore 1 Colors



oak dark walnut 1 Colors



wood Canaletto walnut 1 Colors

#### upholstery



fabric Hallingdal 65





fabric Tonica 2 39 Colors



fabric Iris 24 Colors



Canvas 2 40 Colors



fabric Medlev 37 Colors

fabric

Steelcut 2



fabric

48 Colors

fabric

Maya

Steelcut Trio 3

leather leather



fabric Remix 3 24 Colors





ecoleather GRIMM FR 24 Colors




fabric Clara 2 24 Colors





Lapalma Smart

ecoleather Valencia c5





fabric Fiord 2 24 Colors



Capture 43 Colors 40 Colors



fabric Divina MD 24 Colors







fabric Divina Melange 3 38 Colors



fabric Nattè 23 Colors

#### consult the porfolio for the range of colors, fabrics, eco-leather, soft-leather.

#### use and maintenance instructions

Clean all parts in wood, leather, fabric and metal with a damp cloth or a diluted neutral cleaner. Do not use cleaners with alcohol, bleach, solvent or abrasive products. Any liquid spilt on the product must be wiped up immediately. When lifting or moving the product, hold it on the structure and not under the seat. The product should not be subjected to unbalanced weights, as it is designed for a proper rest on the foothold (on four legs or on the base). Our company relieves from any responsibility in case of damage caused to fragile floors. Avoid any improper use of the product: do not step on the product, on the footrest or on the armrests. Avoid any movements that could compromise the proper functionality of the product or the safety of the users. Wood and leather, being natural materials, could be easily damaged. Small impurities or imperfections are within quality standard range. Do not expose the product to weather conditions or atmospheric agents, nor to heat sources over 40°C. Also products for outdoor use could be afflicted by atmospheric agents. The product could undergo possible exterior changes due to particular exposure to heat, humidity and saltiness. An appropriate and frequent maintenance and cleaning of the product enhances its durability. The product could change colour and shade, if exposed to direct sunlight. Maintenance has to be carried out by experienced staff. Dispose of the package only after assembling the product, in order to avoid the loss of ironmongery and components. Once the product has been dismantled, the product itself or its components must be given to the public garbage disposal system, according to the legislation in force.